

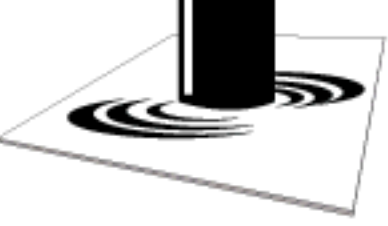
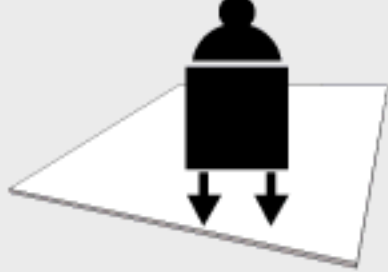
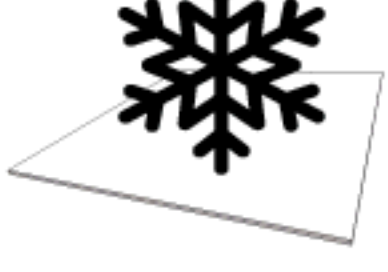




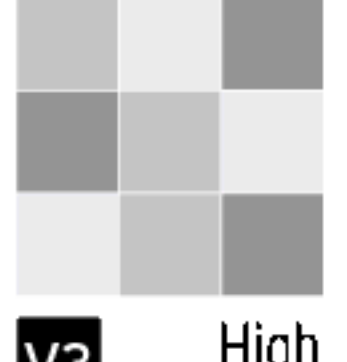


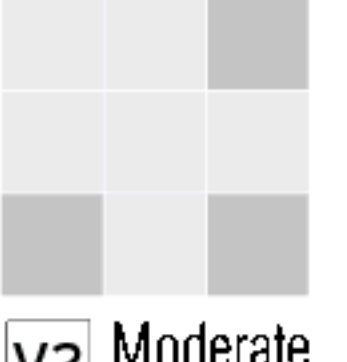
CARATTERISTICHE TECNICHE <i>Technical Features</i> <i>Caracteristiques Techniques</i> <i>Technische Eigenschaften</i> <i>Características Técnicas</i> <i>Технические Характеристики</i>		NORMA <i>Standard</i> <i>Norme</i> <i>Norm</i> <i>Norma</i> <i>Норма</i>	VALORI <i>Value</i> <i>Valeur</i> <i>Vorgabe</i> <i>Valor</i> <i>Средние</i>	
	PLANARITÀ <i>Warpage - Planéité - Ebenflächigkeit - Planiyud - Плоскостность</i>	UNI EN ISO 10545/2	± 0,26%	
		ASTM C485 Warpage	-	
		Calibrated ± 0,75% (max ± 0,09 in)	-	
		Rectified ± 0,40% (max ± 0,05 in-size ≤ 60cm) (max ± 0,07 in-size > 60cm)	± 0,25% (max ± 0,05 in-size ≤ 60cm) (max ± 0,07 in-size > 60cm)	
	ASSORBIMENTO D'ACQUA Valore medio in % <i>Water absorption - Average value expressed in %</i> <i>Absorption d'eau - Valeur moyenne en %</i> <i>Wasseraufnahme - Durchschnittswert in %</i> <i>Absorción de agua - Valor medio en %</i> <i>Поглощение воды</i>	UNI EN ISO 10545/3 ASTM C373	Conforme Compliant	
	RESISTENZA ALL'ABRASIONE PEI <i>Resistance to PEI abrasion - Résistance à l'abrasion du PEI</i> <i>Abriebfestigkeit PEI - Resistencia a la abrasion PEI</i> <i>Стойкость к истиранию PEI</i>	UNI EN ISO 10545/7 ASTM C1027	Paint Blue, Paint Red, Paint Green 4 Paint Blue, Paint Red, Paint Green IV	
	RESISTENZA ALLA FLESSIONE <i>Flexural strength - Resistance a la flexion</i> <i>Biegefestigkeit - Resistencia a la flexion - Прочность на изгиб</i>	UNI EN ISO 10545/4 UNI EN ISO 10545/4 ASTM C648	≥ 50 ≥ 2000 700 LBS	
	RESISTENZA AL GELO <i>Frost resistance - Résistance au gel</i> <i>Frostbeständigkeit - Resistencia a las heladas - Морозостойкость</i>	UNI EN ISO 10545/12 ASTM C1026	Conforme Unaffected	
	RESISTENZA CHIMICA ad alte e basse concentrazioni di acidi e basi <i>Chemical resistance to high and low acid and basic concentrations</i> <i>Résistance chimique aux hautes et basses concentrations d'acides et de bases</i> <i>Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen</i> <i>Resistencia química con concentraciones altas y bajas de ácidos y bases</i> <i>ХИМИЧЕСКАЯ СТОЙКОСТЬ К ВЫСОКИМ И НИЗКИМ КОНЦЕНТРАЦИЯМ КИСЛОТ И ЩЕЛОЧЕЙ</i>	UNI EN ISO 10545/13 ASTM C-650	Paint Blue, Paint Red, Paint Green GA - GLA - GHA Unaffected	
		UNI EN ISO 10545/13 ASTM C-650	UA - ULA - UHA Unaffected	
	RESISTENZA ALLE MACCHIE <i>Stain resistance - Résistance aux taches</i> <i>Fleckenbeständigkeit - Resistencia a las manchas - Стойкость к образованию пятен</i>	UNI EN ISO 10545/14 CTI 81-7D	5 No Evident Variation	
	SCIVOLOSITÀ <i>Slip level - Coefficient de glissement</i> <i>Rutschfestigkeit - Coeficiente de atrito medio - Скольжение</i>	DIN 51130 DIN 51097 ASTM C1028 ASCIUTTO-DRY/BAGNATO-WET DM 236/89 METODO B.C.R.A.	Naturale R10 C (A+B+C) ≥ 0,60 / ≥ 0,60 ≥ 0,40	Lappato - - - -

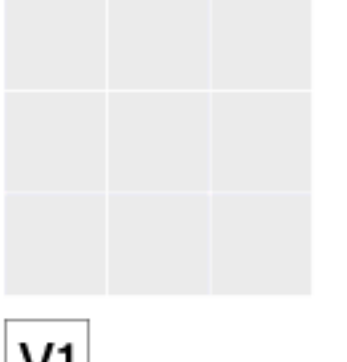
PER MAGGIORICHIARIMENTI SUI DATI TECNICI E SULLA GARANZIA CONSULTARE IL CATALOGO GENERALE IN VIGORE. For further information on technical specifications, please consult our up-dated general catalogue. Für weitere Informationen über technische Daten und Garantie beziehen sie sich bitte auf den aktuellen Gesamtkatalog. - Pour toutes informations supplémentaires sur les données techniques et sur les garanties, veuillez consulter le catalogue général en vigueur. Para ulteriores informaciones sobre los datos técnicos y la garantía, vease el catalogo general en vigor. Более подробную информацию о технических данных и гарантии смотрите в действующем сводном каталог.

SHADE VARIATION


V4 Random


V3 High


V2 Moderate


V1


CEMENTO CASSAFORMA COLORATA


HEAVY COMMERCIAL


HT

LIGHT COMMERCIAL

MT


Ceramics of Italy


5%


放射性水平为A

IMBALLI E PESI Packing and weight - Emballages et poids - Verpackung und gewicht - Embalajes y pesos - Упаковка и вес

Articolo Item Reference Artikel Articulo Артикула	Formato Size Format Format Тamaño ФОРМАТ cm.	Spessore Thickness Épaisseur Stärke Espesor ТОЛЩИНА mm.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja ШТ. x КОР.	Mq. x Scat. Sqm x Box M² / Bte Qm x Krt. Mc. x Caja КВ.М. x КОР.	Peso x Scat. Weight x Box Poids / Bte(kg) Gewicht x Krt.(kg) Peso x Caja(kg) ВЕС x КОР. KG	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. КОР. x ПОДД.	Mq. x Pal. Sqm x Pal. M² / Pal. Qm x Pal. Mc. x Pal. КВ.М x ПОДД.	Peso x Pal. Weight x Pal. Poids / Pal.(kg) Gewicht x Pal.(kg) Peso x Pal.(kg) ВЕС x ПОДД. KG
986E_R 986E_P	60x120	10,5	2	1,44	35,0	14	20,16	490
606E_R 686E_P	60x60	10,5	3	1,08	25,0	36	38,88	900
636E_R	30x60	10,5	6	1,08	25,0	40	43,20	1000
556E_GR	30x120	10,5	4	1,44	34,4	14	20,16	482
546E_GR	20x120	10,5	4	0,96	23,5	33	31,68	776
536E_GR	15x120	10,5	6	1,08	22,4	28	30,24	627
I306E I306E_G	30x30	10,5	5	0,45	10,3	60	27,00	618